

## Barrel Sauna Roof Installation Kit Manual



## **Barrel Sauna Roof Installation Kit Instructions**

Your barrel sauna roof kit consists of felt roofing to facilitate water run-off and a slatted wood covering to hold down the felt and provide aesthetic appeal. Your barrel sauna roof kit consists of the following:

- (3) Pieces of felt roofing
- (2) Slatted roof sections
- (1) Bag of 2" finishing nails
- (1) Bag of 1" roofing nails

Your barrel sauna roof kit will keep water from dripping into the top of the sauna. However, your sauna is built of soft wood and therefore will allow moisture to seep between other joints in the sauna. This is normal and will not hurt the sauna.

## Install the barrel sauna roof kit as follows:



**STEP 1** - Roll out the roof sections so that the black straps connecting the slats is facing down. Find the center slat.




**STEP 2** - Center one of the roof sections over the radius of the barrel with the center slat directly above the door of the sauna. Make a mark above the last slat on each side and remove the roof section.



STEP 3 - Line up the edge of one of the felt roof pieces and be sure it runs parallel to the stave boards. It must cover the band on each side before nailing in place with (2) roofing nails. Do this on both sides of the sauna. (Note: The roofing nails are only intended to hold the felt in place for now. It is the roof sections that will actually secure the felt in place.)



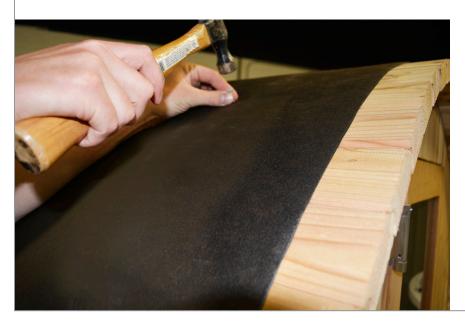



**STEP 4** - Center the third piece of felt over the two side pieces and secure with (2) roofing nails so that it stays in place.



**STEP 5** - Lay the roofing sections over the barrel being sure that the center slat on each section is at the very top of the sauna and centered above the door. Begin at the top and nail down the slats, using just two nails per slat. Place your nails directly above the black strap that connects the slats. NOTE: Be sure that the corresponding slat from each section is lined up to each other and form a straight line. It is helpful to use a straight edge along each row of slats in order to insure that they are straight. Work your way down each side, nailing every other slat. (You can nail every one if you choose.) If you have access to a nail gun the process will go much faster. Also, to have the slats from each roof section line up - it may be necessary to leave the black strapping slightly loose.

NOTE: There are 2 roof sections to facilitate easier handling as well as UPS shipping.

